

bFan Mark 3 – Addendum

Mark 3 vs Mark 2

The Mark 3 bFan was launched in May 2020 and is the same as the Mark 2 bFan except that it has a brushless motor which is quieter and uses a wireless remote control.


Wireless Remote Control

This is a mini remote that is wireless and has 10 speed settings. It also has a timer that will turn the fan off after either 4 or 9 hours. The fan is designed to run at the lower speeds to be quiet so around 2, 3 or 4 but adjust it to give the right level of cooling whilst in use. There will be a little bit of noise due to the air flowing through the fan outlet head but so long as the speed is below 5 this should be very low and barely noticeable.




Battery

The remote uses a small flat lithium CR2025 3V battery readily available in many shops. Pull the small plastic shipping tape to let the battery make contact. If you need to release it press the release catch left when holding the remote up with the back facing you. It is easiest if you pinch together as you pull it out.

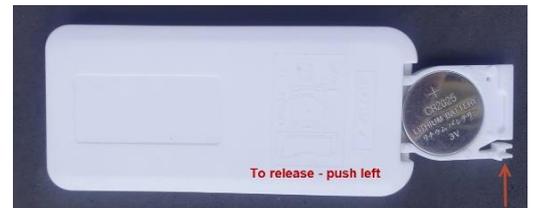

Operation

When you press the power button you should hear a bleep and the blue light on the motor should show.

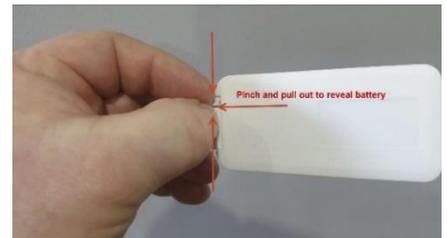

Problems

1. If the bFan doesn't work when you press the remote buttons check if the light at the top is coming on or not. If it is not then it means either the battery needs changing or that the remote is faulty and needs replacing.
2. If the light does come on but nothing happens then it can be the pairing that needs resetting. To do this turn the power on and press your finger to where the blue light should be. It should go blue, hold it for 5 secs and it will flash. Press the power button on the remote once and the motor will bleep twice indicating that it has paired. It should now work.
3. Check that the mains socket is working and the fuse in the plug. If the motor is still not working then please call our office for assistance.



The remote has a 1-year warranty for non-damage faults. Replacements can be purchased from us.

