
MATEMAN







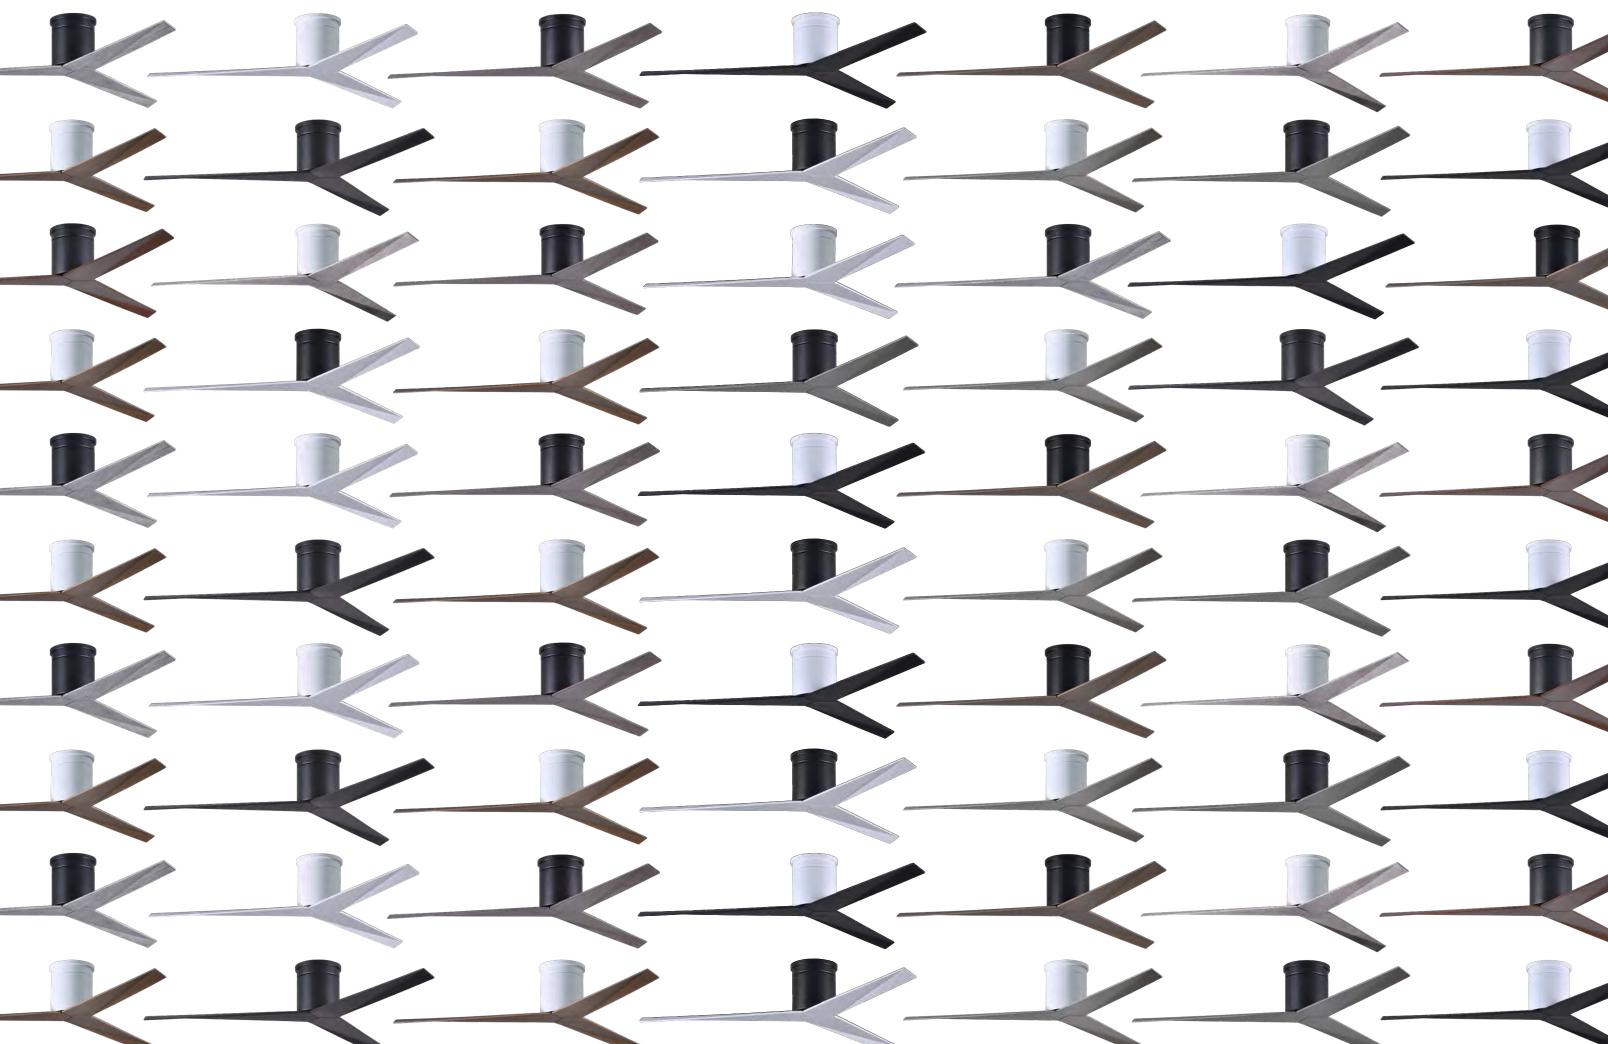

MATTERS

Matthews' fans achieve some of the highest efficiency ratings in the industry through:

- DC Motor technology allows for large, powerful blades which provide more robust airflow and ultra-quiet operation.
- Rotational fans reduce HVAC costs by mixing ambient air more thoroughly.
- Directional and Wall fans provide columnar airflow which can be customized.


Matthews does not field destroy

• 95% of damaged and defective materials are recycled or re-purposed.

Matthews achieves low defect rates because:

- All fans are visually inspected before shipping.
- All rotational and oscillating fans are bench tested before shipping.

MATTHEWS FAN COMPANY PRODUCTS

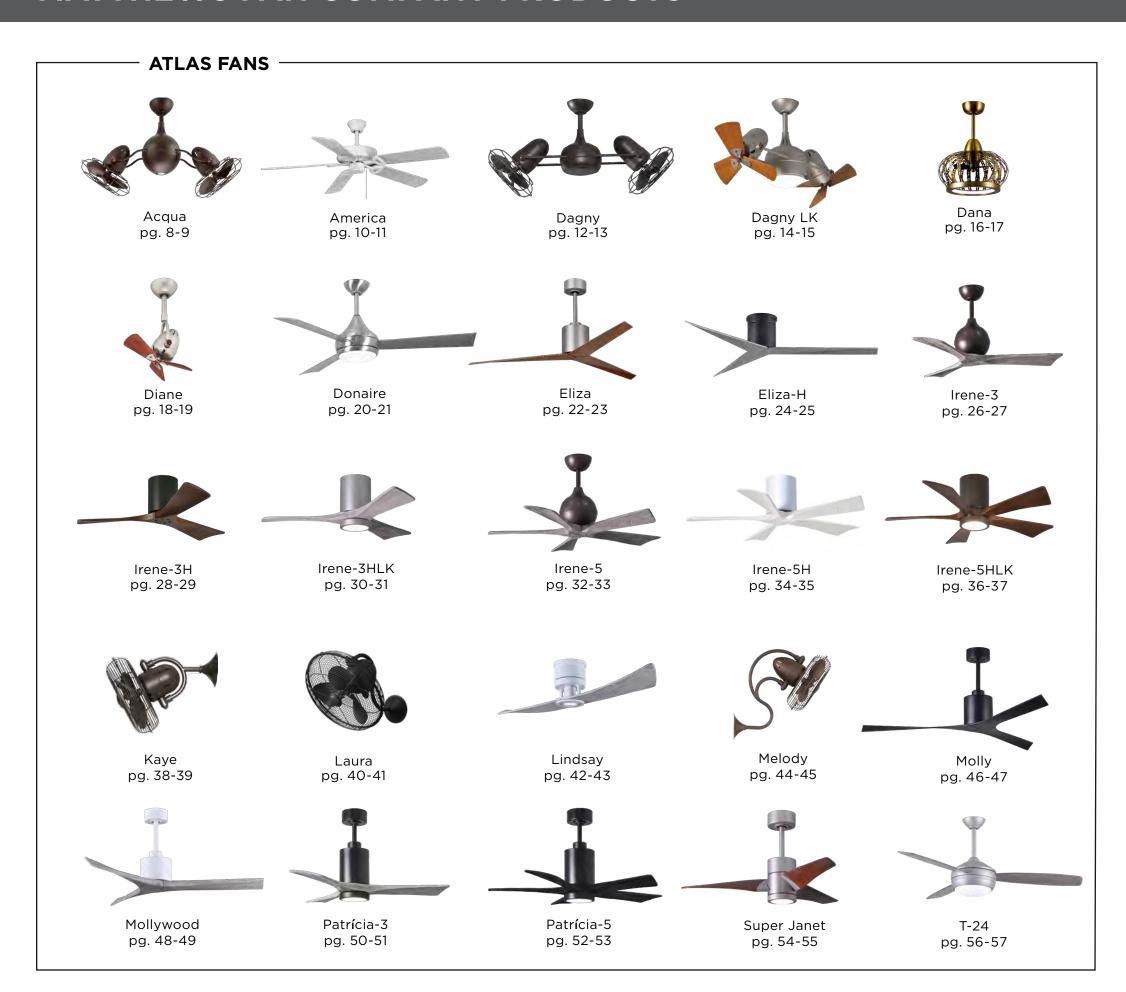

MATTHEWS-GERBAR FANS



Ar Ruthiane pg. 58-59



Bianca Direcional pg. 60-61



Brisa 2000 pg. 62-63



Bruna Parede pg. 64-65



Duplo-Dinamico pg. 66-67



Italo Ventania pg. 68-69




Jarold Direcional pg. 70-71



Michelle Parede pg. 72-73




Vent-Bettina pg. 74-75

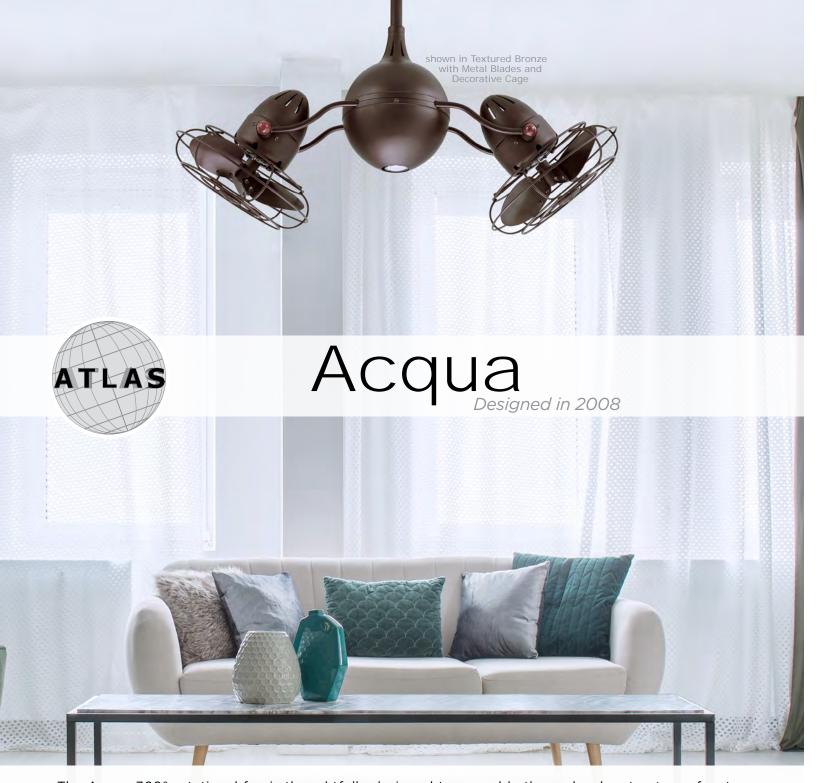

The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.





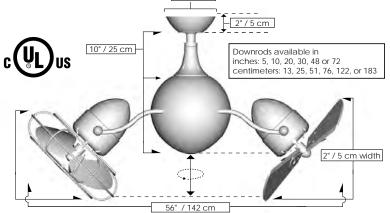

ACQUA

FINISH AND BLADE OPTIONS		
SKU#	AQ-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Textured Bronze	ТВ
Blade Styles	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF
TE	CHNICAL SPECS	
Fan Woight	27 lbs	

TECHNICAL SPECS	
Fan Weight	27 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths Field cuttable.	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Overall Drop	16 inches / 41 cm + downrod length
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime
NEW IAN 21 2020	DOE MOTOR FEEICIENCY DATA

NEW JAN 21, 2020	FICIENCI DAIA	
Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	39 inches / 99 cm	37 inches / 94 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	721 / 1199	1040 / 1445
CFM (Low / High)	2750 / 4058	1825 / 3167
Watts (High)	101.25	80.50
CFM/Watt (High)	40.80	39.34
Blade Pitch	19°	31°

LIGHT KIT PHOTOMETRICS			
Lamping (Replaceable)	GU10 LED		
Remote Dimmable	No		
Delivered Temperature in K	2969		
Delivered Lumens	337.30		
CRI	94		
Watts	5		
Hours	36,000		

Light kit longevity if used 6 Hours/Day: 16.5 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse



ACCESSORY Decora-style, 3-speed, non-dimmable wall control





The America fan is a practical solution for both residential or commercial spaces with a more traditional aesthetic. It is available with either 42 or 52 inch diameters, along with an optional light kit. The blades are reversible as either white or light oak tone finish. The America carries a limited lifetime warranty.















USA

Applicability to Buy American Act:

Domestic Construction Materials Clause (Feb 2009): 52-225-9 (4)(2)(i). The cost of its components mined, produced, or manufactured in the United States exceeds 50 percent of the cost of all its components.

Breakdown of Origin of Materials:

Ceiling fan parts are made in Taiwan, a World Trade Organization Government Procurement Agreement country. Final assembly and UL 507 electrical compliance testing will be done in the US. US labor will be used in the assembly, handling and testing of this fan

	ITEM	ORIGIN	% of COST of ITEM
	Fan Components	Taiwan	41.18%
	U.S. Labor MFC Facility*	USA	34.46%
	Domestic Shipping	USA	10.34%
	International Shipping	USA	11.20%
	US Duty	USA	1.96%
	Shipping Insurance	USA	0.88%
2	* US labor cost includes	s, but is n	ot limited to:

hands-on assembly, packaging and warehousing.

Taiwan

Applicability to Buy American Act -

Construction Materials Under Trade Agreements:

Construction Materials Clause

(Aug 2009): 52-225-11 as prescribed in 25-1102. Ceiling fan parts and assembly comprise a "WTO GPA country end-product.'


Breakdown of Origin of Materials:


Ceiling fan is made in Taiwan, a World Trade Organization Government Procurement Agreement country.

ITEM Ceiling Fan Components/ Assembly Labor	ORIGIN Taiwan	% of COST of ITEM 74.59%
Shipping/ Handling / Insurance / Duty	USA	25.41%





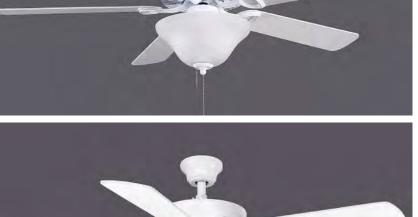

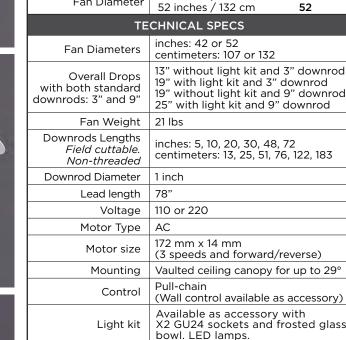

Ambience

Safety Certification

SKU#

Light Kit

Fan Diameter

AMERICA

FINISH AND BLADE OPTIONS

Light Kit

AMERICA-XX-XX-XX

Without Light Kit

42 inches / 107 cm

(Model+Diameter+Light)

LK

42

52

	Vaulted ceiling canopy for up to 30°					
W	W JAN 21, 2020 DOE MOTOR EFFICIENCY DATA					
		With 3" Downrod	With 3" Downrod	With 9" Downrod	With 9" Downrod	
		42 inch	52 inch	42 inch	52 inch	

Silent

Warranty | Limited Lifetime


STANDARD EQUIPMENT

One downrod of 3 inches / 8 cm

One downrod of 9 inches / 23 cm

UL Listed - Dry Location

107 cm 132 cm 107 cm 132 cm RPM (Low/High) 87 / 243 54 / 162 93 / 249 57 / 166 1586/5036 1699/4643 CFM (Low/High) 1330/3776 1313 / 4083 64.00 Watts (High) 60.82 64.67 59.00 63.14 CFM/Watt (High) 62.08 79.00 79.00

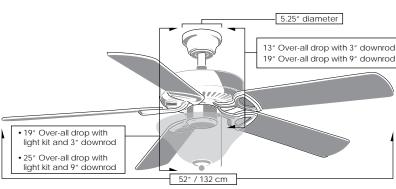







Dagny Designed in 2011



The double-headed 360° rotational fan, Dagny, with cylindrical central housing and straight, parallel arms, is designed in the retrospective aesthetic. The Dagny offers smooth and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Dagny carries a limited lifetime warranty. The Dagny is also available with a light kit as the *Dagny-LK*.





DAGNY

FINISH AND BLADE OPTIONS			
SKU#	DG-XX-XXXX (Model+Finish+Blade)		
Standard Finish	Textured Bronze	ТВ	
Blade Styles	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF	
TE	ECHNICAL SPECS		
Fan Weight	22 lbs		
Voltage	110 (Contact us for 220 cor	version)	
Motor Type	AC		
Rotation	Yes		
Downrods Lengths	inches: 5, 10, 20, 30, 48, 72		

1 inch

centimeters: 13, 25, 51, 76, 122, 183

14 inches / 36 cm + downrod length

Damp locations for all finishes Neither coastal, saltwater nor

chlorine compatible

Soothing White Noise

Warranty | Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA Fan Head Options Solid Wood Metal with Guard Fan Diameter 41 inches / 104 cm 39 inches / 99 cm Fan Blade Diameter 16 inches / 41 cm 13 inches / 33 cm Safety Cage or Decorative Cage **Guard Options** No Cage Option RPM (Low / High) 807 / 1256 1035 / 1448 2197 / 3393 2199 / 3169 CFM (Low / High) Watts (High) 100.40 80.69 CFM/Watt (High) 33.80 39.27

STANDARD EQUIPMENT

19°

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 29°

ACCESSORY



Field cuttable,

Non-Threaded

Downrod Diameter

Overall Drop

Environment

Ambience

Blade Pitch

Safety Certification UL / CUL



31°





With clean, fluid lines, the Dagny LK 360° rotational fan is a striking centerpiece in any space. Its movement about its cylindrical center housing is smooth and quiet. Dagny LK's dual fan heads can be infinitely positioned in 180-degree arcs for optimum and customized air movement. As the angle between the fan heads and the horizontal support rods is increased, so does the speed of Dagny LK's axial rotation. Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed from cast aluminum and heavy stamped steel, the Dagny LK carries a limited lifetime warranty. This model is also available without a light kit as the Dagny.























DAGNY LK

FINISH AND BLADE OPTIONS

	SKU# DGLK-XX-XXXX (Model+Finish+Blade)		
NEW Standard Finishes		Brushed Nickel Matte Black Textured Bronze	BN BK TB
NEW	Blade Styles	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF

TECHNICAL SPECS		
Overall Drop	14 inches / 41 cm + downrod length	
Fan Weight	22 lbs	
Voltage	110 (Contact us for 220 conversion)	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths Field cuttable, Non-Threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	41 inches / 104 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	757 / 1256	1069 / 1442
CFM (Low / High)	2557 / 4171	1844 / 3067
Watts (High)	87.36	80.50
CFM/Watt (High)	47.74	38.06
Blade Pitch	19°	31°

	LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)		Integrated LED	
Remote Dimmable		Yes	
Delivered Temperature in K Delivered Lumens CRI		2969	
		523.7	
		90	
	Watts	18	
	Hours	50.000	

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse





Decora-style, 3-speed, non-dimmable wall control





Dana Designed in 2019 ATLAS



Both ceiling fan and LED pendant, Dana is our most versatile fixture. Her diminutive blades and LED light kit are concealed by intricate, organically inspired metal work finished in Matte Black, Matte White, Brushed Bronze, or Brushed Brass. Constructed of cast aluminum and heavy stamped steel, the Dana carries a limited lifetime warranty.






















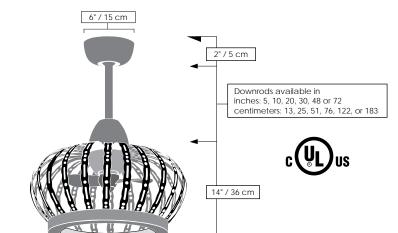

DANA

FINISH AND BLADE OPTIONS

SKU#	DM-XXXX (Model+Finish)	
andard Finishes	Brushed Brass Brushed Bronze Matte Black Matte White	BRBR BB BK MWH

TECHNICAL SPECS

Fan Diameter	20 inches / 51 cm
Overall Drop	16 inches/41 cm + downrod length
Fan Weight	23 lbs
Voltage	110 or 220
Motor Type	AC
Downrods Lengths Field cuttable, Non-Threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 1095 / 1666

CFM (Low / High)	691 / 1100
Watts (High)	32
CFM/Watt (High)	42
Blade Pitch	31°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	Yes
Delivered Temperature in K	2923
Delivered Lumens	516
CRI	93.8
Watts	24
Hours	49,000

Light kit longevity if used 6 Hours/Day: 22.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 29°

Light cover

Black 3-speed RF remote

control with


reverse



Decora-style, 3-speed, non-dimmable wall control



17

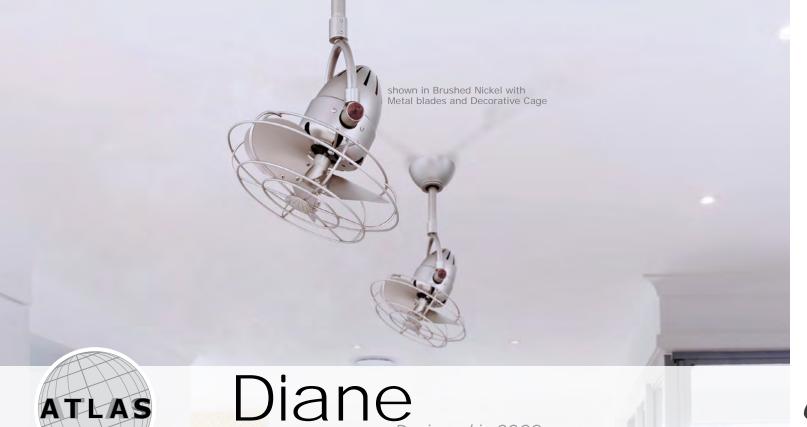



The Diane directional fan head provides maximum airflow with a sweeping 90° forward and reverse oscillation. The Diane can be hung in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Diane carries a limited lifetime warranty.





DIANE

FINISH AND BLADE OPTIONS		
SKU#	DI-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Brushed Nickel BN Matte Black BK Polished Chrome CR Textured Bronze TB	
Blade Styles	Solid Wood/Barn Wood Solid Wood/Mahogany Solid Wood/Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF
TECHNICAL SPECS		

TECHNICAL SPECS		
Fan Weight		12 lbs
Voltage		110 or 220
Motor Type		AC
(Oscillation	Yes
Downrods Lengths Field cuttable. Non-threaded		inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter		1 inch
Overall	Metal Blades	14 inches / 36 cm + downrod length
Drop	Wood Blades	12 inches / 30 cm + downrod length
Environment		Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience		Soothing White Noise
Safety Certification		ETL / CETL
Warranty		Limited Lifetime
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage
RPM (Low / High)	915 / 1352	900 / 1377
CFM (Low / High)	1100 / 1623	1068 / 1345
Watts (High)	51.37	46.14
CFM/Watt (High)	31.60	29.16
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 29°

ACCESSORY





Decora-style, 3-speed wall control in white

























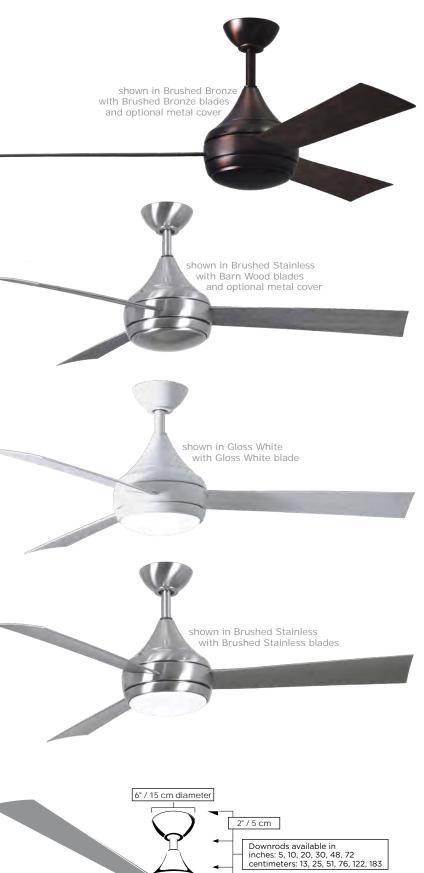

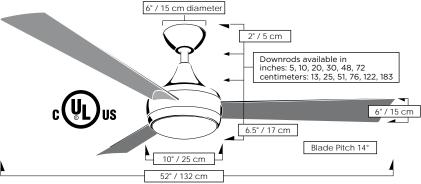

DONAIRE

FINISH AND BLADE OPTIONS		
SKU#	DA-XX-XX (Model+Finish+Blad	e)
Standard Finishes	Brushed Bronze Brushed Stainless Gloss White	BB BS WH
Blade Finish	Barn Wood Tone Brushed Bronze Brushed Stainless Gloss White	BW BB BS WH

TECHNICAL SPECS		
Fan Diameter	52 inches / 132 cm	
Overall Drop	8.5 inches/22 cm +downrod length	
Fan Weight	29 lbs	
Voltage	110 or 220	
Motor Type	AC	
Downrods Lengths Field cuttable, Non-Threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Environment	Coastal and wet locations All weather blade system	
Ambience	Silent	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

CFM/Watt (High)	102.57	
Blade Pitch	14°	
LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)		Integrated LED
Remote Dimmable		Yes
Delivered Temperature in K		3017
Delivered Lumens		725

RPM (Low / High) | 55 / 172 CFM (Low / High) 1775 / 6013 Watts (High) 58.62

CRI

Watts

Hours

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 29°

Light cover

ACCESSORY

Black 3-speed RF remote control with reverse





Decora-style, 3-speed, non-dimmable wall control



90

16 60,000

Blade Options







Gloss White







10" / 25 cm

56" / 142 cm

Blade Pitch 27°

ELIZA

FINISH AND BLADE OPTIONS		
SKU#	EK-XX-XX (Model+Finish+Bla	de)
Standard Finishes	Brushed Nickel Gloss White Matte Black	BN WH BK
Blade Finish	Barn Wood Brushed Nickel Gloss White Gray Ash Matte Black Old Oak Walnut	BW BN WH GA BK OO WN

TECHNICAL SPECS		
Fan Diameter	56 inches / 142 cm	
Overall Drop	12 inches/30 cm+downrod length	
Fan Weight	17 lbs	
Voltage	110 or 220	
Motor Type	DC	

inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76,122,183 non-threaded Downrod Diameter | 1 inch Wet locations for all finishes All weather blade system. Environment

Neither coastal, saltwater nor chlorine compatible Ambience Silent

Downrods Lengths

Field cuttable,

Safety Certification | ETL / CETL Warranty Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) | 55 / 172

CFM (Low / High) | 1633 / 5439 Watts (High) 33.13 CFM/Watt (High) 164.16

Blade Pitch 27° STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



NOTE: Only compatible with included controllers.

White wireless Decora-style, 6-speed, wall control with reverse

Blade Options











Brushed Nickel

Matte Black

Gloss White



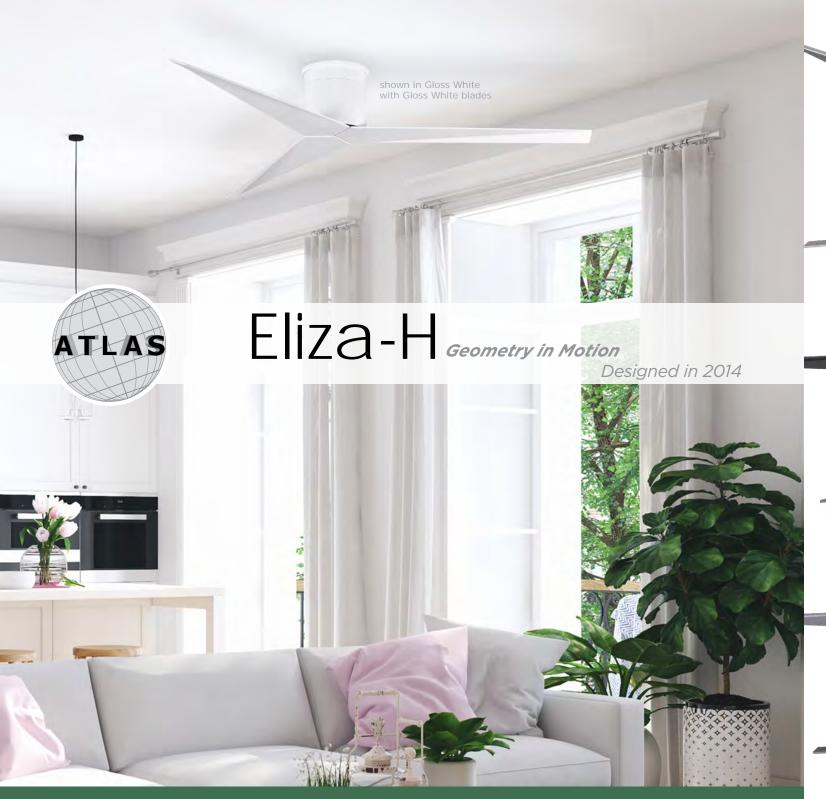

Designed by Chicago architect Stephen Katz in 2014, the Eliza-H ceiling-mount fan blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza-H's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza-H has a limited lifetime warranty.





56" / 142 cm

ELIZA-H FINISH AND BLADE OPTIONS EKH-XX-XX SKU# (Model+Finish+Blade) **Brushed Nickel** Standard Gloss White WH Matte Black Barn Wood **Brushed Nickel** BN Gloss White WH Blade Finish Gray Ash GΑ Matte Black BK Old Oak 00 Walnut WN **TECHNICAL SPECS** Fan Diameter 56 inches / 142 cm Overall Drop 10 inches / 25 cm Fan Weight 14 lbs Voltage 110 or 220 Motor Type DC Damp locations for all finishes Environment Neither coastal, saltwater nor chlorine compatible Silent Ambience Safety Certification | ETL / CETL Warranty Limited Lifetime

STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse



Watts (High) 33.49

Blade Pitch 27°

White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.

Blade Options

















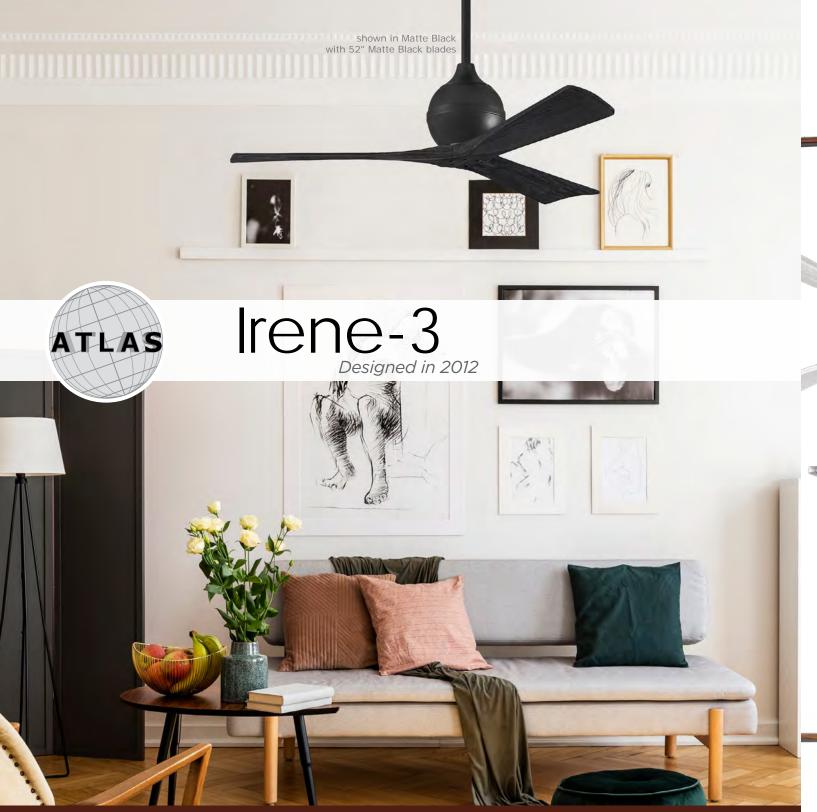

The Irene-3 is rustic, yet strikingly modern with three neatly joined, solid matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-3 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3 has a limited lifetime warranty.



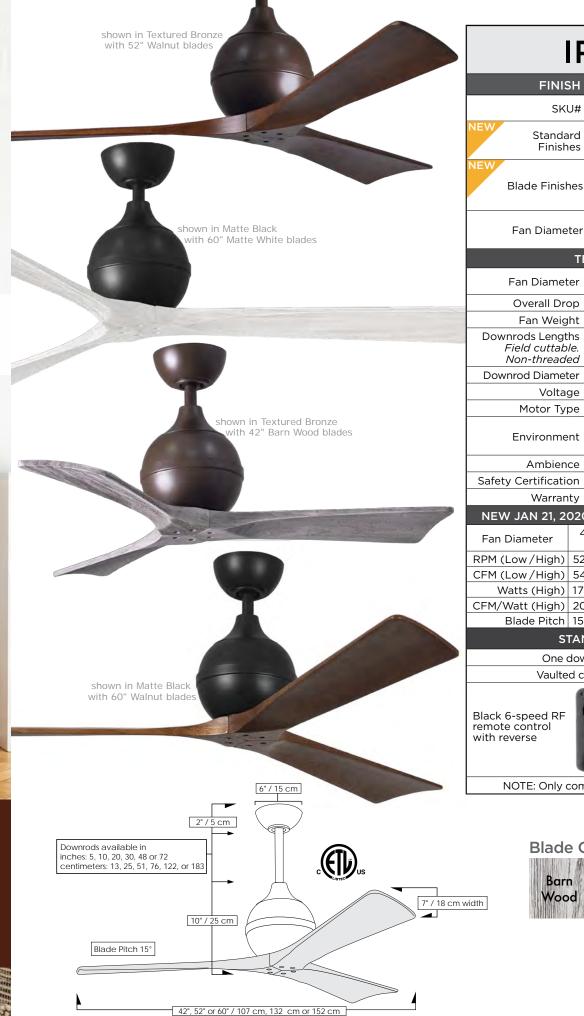

IRENE-3 FINISH AND BLADE OPTIONS IR3-XX-XXX-XX (Model+Finish+Blade+Diameter) Matte Black Standard Finishes **Textured Bronze** TB Barn Wood Tone **Matte Black** BK Blade Finishes Matte White MWH Walnut Tone WA 42 inches / 107 cm 42 Fan Diameter 52 inches / 132 cm 52 60 inches / 152 cm 60 **TECHNICAL SPECS**

inches: 42, 52 or 60 centimeters: 107, 132 or 152 Fan Diameter Overall Drop 12 inches/30 cm + downrod length Fan Weight **Downrods Lengths** inches: 5, 10, 20, 30, 48, 72 Field cuttable. centimeters: 13, 25, 51, 76, 122, 183 Non-threaded Downrod Diameter 1 inch 110 or 220 Voltage Motor Type DC Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible Environment

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low/High)	52 / 231	51 / 196	52 / 160
CFM (Low/High)	541 / 3517	1531 / 6168	2088 / 6984
Watts (High)	17.08	32.12	31.67
CFM/Watt (High)	205.91	192.03	220.54
Blade Pitch	15°	15°	15°

Silent

ETL / CETL Warranty | Limited Lifetime

Ambience

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.

Blade Options





Matte White







IRENE-3HLK

FINISH AND BLADE OPTIONS IR3HLK-XXXX-XXX-XX SKU# (Model+Finish+Blade+Diameter) **Brushed Brass** Brushed Nickel ΒN Polished Chrome CR Standard Finishes **Textured Bronze** ТВ Gloss White WH Matte Black BK Barn Wood Tone BW Matte Black Blade Finishes Matte White **MWH** WA Walnut Tone 42 inches / 107 cm 42 Fan Diameter 52 inches / 132 cm 52 60 inches / 152 cm 60

TECHNICAL SPECS inches: 42, 52 or 60 centimeters: 107, 132 or 152 Fan Diameter Overall Drop 10 inches / 25 cm Fan Weight | 12 lbs Voltage 110 or 220 DC Motor Type Damp locations for all finishes Neither coastal, saltwater nor Environment chlorine compatible Ambience Silent ETL / CETL Safety Certification Warranty | Limited Lifetime

NEW JAN 21, 2	020 DOE MC	TOR EFFICI	ENCY DATA
Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low/High)	50 / 232	51 / 212	51 / 152
CFM (Low/High)	701 / 3573	1057 / 5047	1783 / 5878
Watts (High)	17.61	32.49	30.81
CFM/Watt (High)	203.00	155.35	190.78
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3075	
Delivered Lumens	690	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

Light Cover

Black 6-speed RF remote control with reverse

7" / 18 cm width



White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.


Blade Options




Matte Black

Matte White



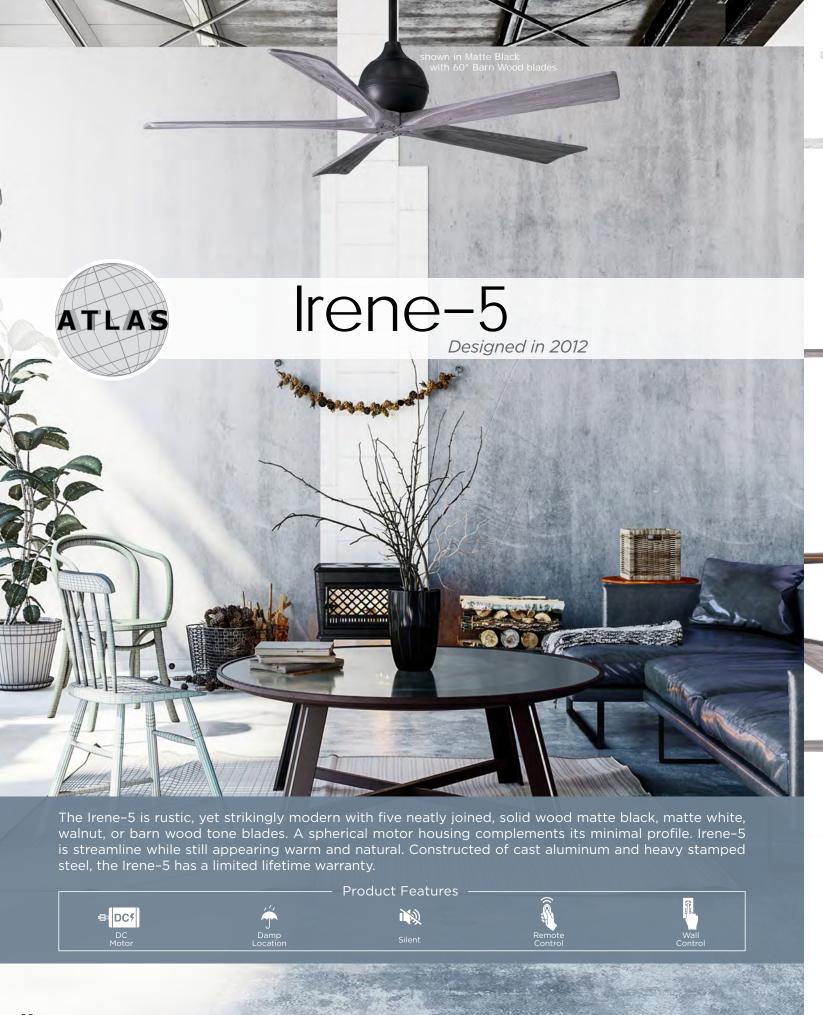

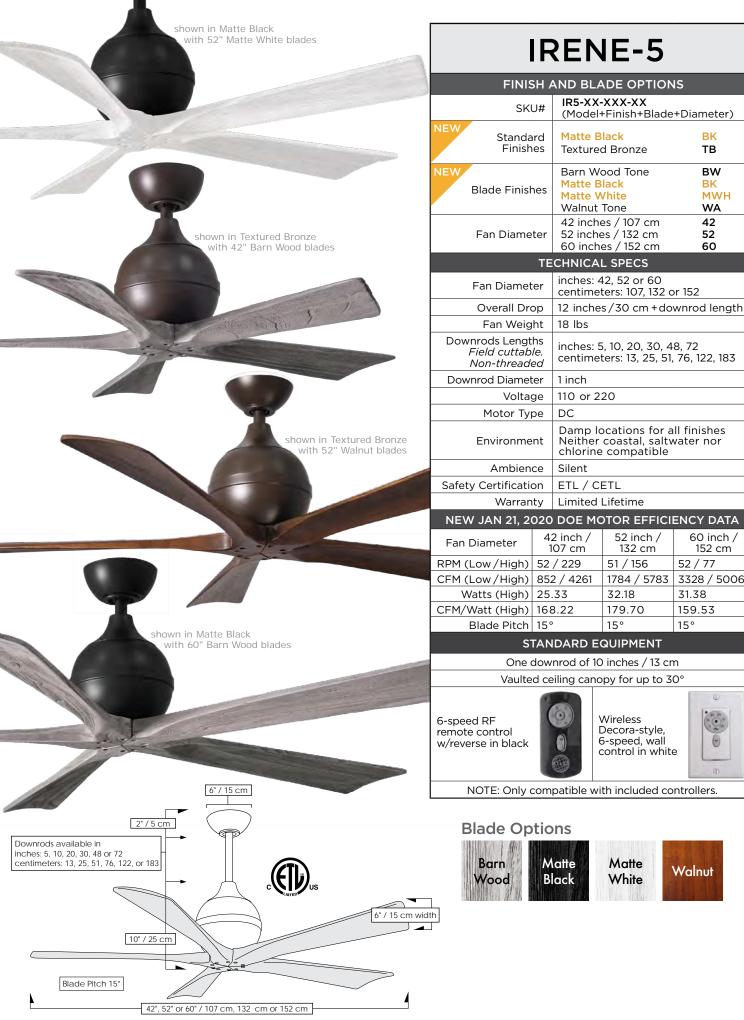

IRENE-5

FINISH AND BLADE OPTIONS		
SKU#	IR5-XX-XXX-XX (Model+Finish+Blade+[Diameter)
NEW Standard Finishes	Matte Black Textured Bronze	BK TB
NEW Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60
TECHNICAL SPECS		

TECHNICAL SI ECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Overall Drop	12 inches/30 cm+downrod length	
Fan Weight	18 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 or 220	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low/High)	52 / 229	51 / 156	52 / 77
CFM (Low/High)	852 / 4261	1784 / 5783	3328 / 5006
Watts (High)	25.33	32.18	31.38
CFM/Watt (High)	168.22	179.70	159.53
Blade Pitch	15°	15°	15°

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 30°

6-speed RF remote control w/reverse in black



Wireless Decora-style, 6-speed, wall control in white



NOTE: Only compatible with included controllers.

Blade Options












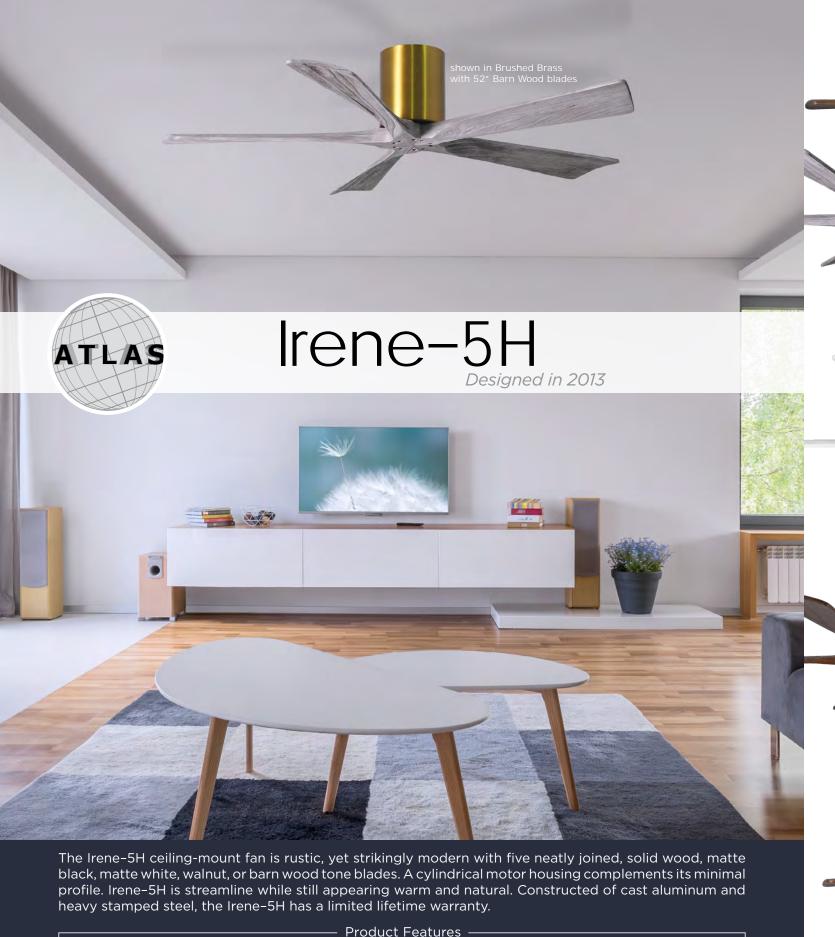

ijŊ

Silent

⊕ DC5

hown in Brushed Nickel **IRENE-5H** vith 52" Walnut blades **FINISH AND BLADE OPTIONS** IR5H-XXXX-XXX-XX SKU# (Model+Finish+Blade+Diameter) **Barn Wood Brushed Brass BRBR Brushed Bronze Brushed Nickel** Standard Finishes Gloss White WH BK Matte Black Polished Chrome CR TB Textured Bronze WN BW Barn Wood Tone Matte Black Blade Finishes with 60"Barn Wood blades Matte White MWH Walnut Tone WA 42 inches / 107 cm 42 Fan Diameter 52 inches / 132 cm 52 shown in Matte Black with 42"Matte Black blade 60 inches / 152 cm 60 TECHNICAL SPECS inches: 42, 52 or 60 Fan Diameter centimeters: 107, 132 or 152 Overall Drop 10 inches/25 cm Fan Weight 12 lbs 110 or 220 Voltage DC Motor Type shown in Gloss White with 52" Matte White blades Damp locations for all finishes Environment Neither coastal, saltwater nor chlorine compatible Ambience Silent Safety Certification ETL / CETL Warranty Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA 42 inch / 52 inch / 60 inch / Fan Diameter shown in Walnut 107 cm 132 cm 152 cm with 42" Barn Wood blade RPM (Low/High) 51 / 226 51 / 151 51 / 78 CFM (Low/High) 855 / 3989 1631 / 4970 | 2201 / 3543 Watts (High) 25.76 31.46 31.58 CFM/Watt (High) 154.84 157.98 112.12 Blade Pitch 15° 15° 15° shown in Textured Bronze with 42" Walnut blades STANDARD EQUIPMENT Wireless 6-speed RF Decora-style, remote control 6-speed, wall w/reverse in black control in white shown in Brushed Bronze with 42" Matte Black black NOTE: Only compatible with included controllers. 7" / 18 cm shown in Barn Wood with 42" Walnut blade 10" / 25 cm **Blade Options** Blade Pitch 15° 2" / 5 cm Matte Barn Matte Walnut Wood Black White 42", 52" or 60" / 107 cm, 132 cm or 152 cm 35





IRENE-5HLK

FINISH AND BLADE OPTIONS			
SKU#	IR5HLK-XXXX-XXX-XX (Model+Finish+Blade+Dia	ameter)	
Standard Finishes	Brushed Brass Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	BRBR BN CR TB WH BK	
NEW Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA	
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60	
TECHNICAL SPECS			

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Overall Drop	12 inches/25 cm	
Fan Weight	13 lbs	
Voltage	110 or 220	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
	Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
	RPM (Low/High)	51 / 220	51 / 179	51 / 88
	CFM (Low/High)	861 / 4215	1212 / 4749	2116 / 3660
	Watts (High)	31.66	31.12	30.78
-	CFM/Watt (High)	113.12	152.59	118.90
	Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3075	
Delivered Lumens	690	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

Light Cover

6-speed RF remote control w/reverse in black



Wireless Decora-style, 6-speed, wall control in white



NOTE: Only compatible with included controllers.

Blade Options





Matte White





The beautiful Kaye 3-speed versatile-mount, wall or ceiling fan, oscillates left to right, forward and reverse, in a 90° sweep. Its design is reminiscent of vintage train cabin ventilators of yester-year, and will cool down your favorite space with poise and determination. Kaye's profile is low, however its strength and character define it. Kaye can be mounted in any small or awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of your favorite space. Constructed of cast aluminum and heavy stamped steel, the Kaye carries a limited lifetime warranty.























KAYE

FINISH AND BLADE OPTIONS			
	SKU#	KC-XX (Model+Finish)	
	Finishes	Brushed Nickel Matte Black Polished Chrome Textured Bronze Gloss White	BN BK CR TB WH

TECHNICAL SPECS		
Fan Weight	10.5 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	Yes	
Fan Diameter	13 inches / 33 cm	
Fan Height	13 inches / 33 cm	
Fan Projection	17.5 inches / 44 cm	
Ceiling Mount Overall Drop	17.5 inches / 44 cm	
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling	
Fan Guard	Safety Cage	
Blade Pitch	31°	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Soothing White Noise	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) | 1213 / 1445 CFM (Low / High) 868 / 1303 Watts (High) 47.68 CFM/Watt (High) 27.32 Blade Pitch 31°

STANDARD EQUIPMENT

Safety cage

Side-mounted wall junction box

White Decorastyle, 3-speed wall control



Black 3-speed RF remote control

ACCESSORY



Note:

- 1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- 2) The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



ATLAS

Laura Designed in 2017



The Laura 3-speed, left-to-right 90 degree oscillating wall fan offers the best in function. Its patented design boasts a whisper-quiet DC motor, remote control operation and easy 2-wire installation. Compact and powerful, Laura can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning. Constructed of cast aluminum and heavy stamped steel, Laura carries a limited lifetime warranty.

Safety Cage Equipped

























LAURA FINISH AND BLADE OPTIONS

	SKU#	LL-XX (Model+Finish)	
W	Finishes	Brushed Nickel Matte Black Textured Bronze	BN BK TB

TECHNICAL SPECS			
Fan Weight	12 lbs		
Voltage	110 - 240		
Motor Type	DC		
Oscillation	Yes		
Fan Diameter	16 inches / 41 cm		
Fan Height	14.5 inches / 37 cm		
Fan Projection	19.5 inches / 50 cm		
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling		
Fan Guard	Safety Cage		
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		
Warranty	Limited Lifetime		
NEW IAN 21 2020	DOE MOTOR EFFICIENCY DATA		


NEW JAN 21, 2020	D DOE MOTOR EFFICIENCY DATA
RPM (Low / High)	1231 / 1520
CFM (Low / High)	1056 / 1600
Watts (High)	28.1
CFM/Watt (High)	56.94
Blade Pitch	31°

STANDARD EQUIPMENT

Safety cage Side-mounted wall junction box Black 3-speed RF remote control

2-wire system required to operate the oscillation mechanism independent of the fan blades.



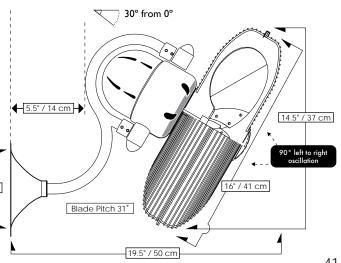



Lindsay Designed in 2019 ATLAS




The Lindsay ceiling fan offers a simple, yet refined air flow solution to any space. The two elegant, solid wood blades quietly circulate air as they revolve around an understated central motor housing. Integrated into the design is an eco-friendly, dimmable LED light kit which will provide illumination for decades to come. The Lindsay is available in matte black, matte white and textured bronze finishes. Blade finish options are barn wood, matte black, matte white or walnut. Constructed of cast aluminum and heavy stamped steel, Lindsay carries a limited lifetime warranty.

		Pı	roduct Feature	25		
	,	• •	· Saast F satar.		<u> </u>	<u> </u>
⊕ DC5		MÝ	· <u></u>		<u>(V)</u>	
	_ J	-72	 LED	■ + Dimmable		
DC Motor	Damp Location	Silent	Lamp	Lamp	Remote Control	Wall Control







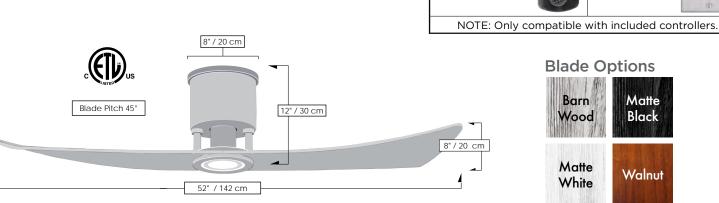

LINDSAY

FINISH AND BLADE OPTIONS				
SKU#	LW-XXX-XXX (Model+Finish+Blad	de)		
Standard Finishes	Matte Black Matte White Textured Bronze	BK MWH TB		
Blade Finish	Barn Wood Matte Black Matte White Walnut	BW BK MWH WN		
TECHNICAL SPECS				

Fan Diameter	52 inches / 132 cm
Overall Drop	10 inches / 25 cm
Fan Weight	11 lbs
Voltage	110 (Please contact us for 220V)
Motor Type	DC
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 51 / 220

Warranty Limited Lifetime

	0., 220
CFM (Low / High)	1097 / 4955
Watts (High)	29.61
CFM/Watt (High)	166
Blade Pitch	45°

LIGHT KIT PHOTOMETRICS			
Lamping (Replaceable)	Integrated LED		
Remote Dimmable	Yes		
Delivered Temperature in K	2940		
Delivered Lumens	557		
CRI	93.7		
Watts	17		
Hours	37.000		

Light kit longevity if used 6 Hours/Day: 16.9 Years

STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



Blade Options





Matte







The oscillating Melody, 3-speed wall-mounted fan, designed in the Art Nouveau style with a grand, arching gooseneck, provides maximum multi-directional airflow with its 90° left to right sweep. Melody can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Melody carries a limited lifetime warranty.




















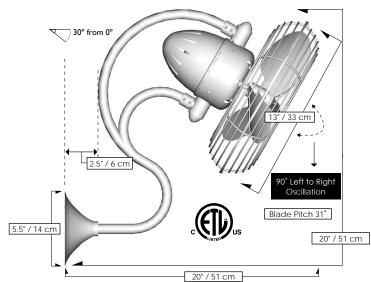

MELODY

FINISH AND BLADE OPTIONS				
	SKU#	ME-XX (Model+Finish)		
IEW	Finishes	Matte Black Textured Bronze	BK TB	
TECHNICAL SPECS				
	Fan Weight	14 lbs		
	Voltage	110 or 220		

Fan Weight	14 lbs
Voltage	110 or 220
Motor Type	AC
Oscillation	Yes
Fan Diameter	13 inches / 33 cm
Fan Height	20 inches / 51 cm
Fan Projection	20 inches / 51 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing White Noise
Safety Certification	ETL / CETL
Warranty	Limited Lifetime
NEW JAN 21, 2020	DOE MOTOR EFFICIENCY DATA
RPM (Low / High)	1213 / 1495

Blade Pitch 31° STANDARD EQUIPMENT

Safety cage

Side-mounted wall junction box

ACCESSORY

Decora-style, 3-speed wall control in white



CFM (Low / High) 868 / 1303 Watts (High) 47.68 CFM/Watt (High) 27.32

> Black 3-speed RF remote control



- 1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- 2) The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



Constructed of cast aluminum and heavy stamped steel, the Molly carries a limited lifetime warranty.

⊕ DC5

Damp Locatior

Blade Options Matte Gloss Black White shown in Matte Black

Downrods available in inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183

10" / 25 cm

56" / 142 cm

shown in Matte White

MOLLY FINISH AND BLADE OPTIONS MK-XX SKU# (Model+Finish) Standard | Gloss White Finishes | Matte Black BK **TECHNICAL SPECS** Fan Diameter 56 inches / 142 cm Overall Drop 12 inches / 30 cm + downrod length Fan Weight 17 lbs Voltage 110 (Please contact us for 220V) Motor Type Downrods Lengths Field cuttable, inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 non-threaded Downrod Diameter 1 inch Wet locations for all finishes All weather blade system. Environment Neither coastal, saltwater nor chlorine compatible Ambience Silent Safety Certification | ETL / CETL Warranty | Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) | 49 / 116 CFM (Low / High) | 1556 / 3530 Watts (High) 29.96 CFM/Watt (High) 126 Blade Pitch | 45° STANDARD EQUIPMENT One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse

2" / 5 cm width


Blade Pitch 45°



White wireless Decora-style, 6-speed, wall control



NOTE: Only compatible with included controllers.

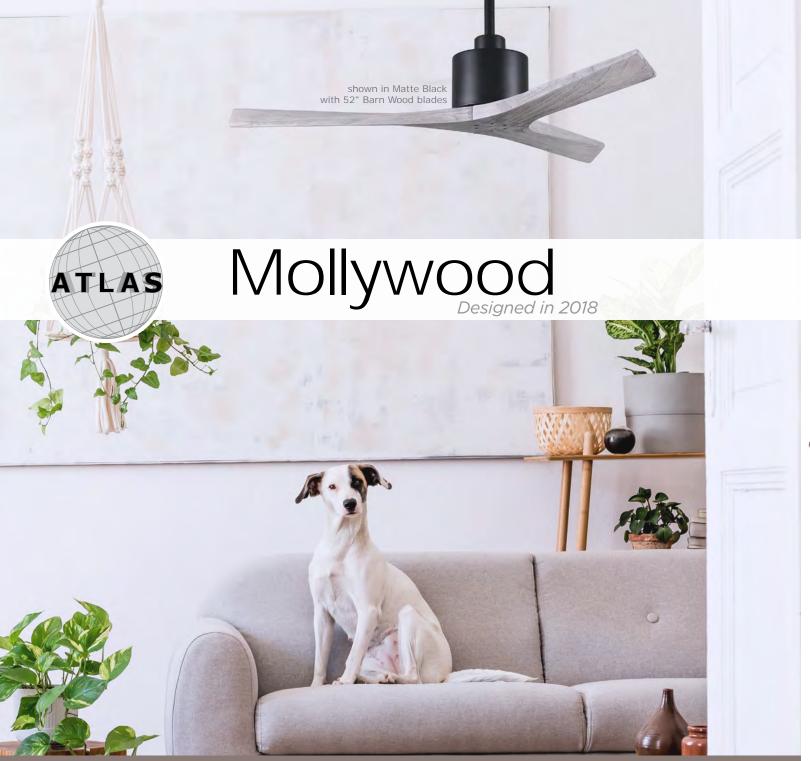

Designed by Chicago architect Stephen Katz in 2018, the Mollywood ceiling fan combines modern organic geometry with outstanding performance and function. The blade shape was developed using advanced computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in matte black, matte white, or textured bronze finishes with either barn wood, matte black, matte white or walnut tone solid wood blade options. Mollywood will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, Mollywood carries a limited lifetime warranty.





MOLLYWOOD

FINISH AND BLADE OPTIONS				
SKU#	MW-XXX-XXX-XX (Model+Finish+Blade+Dia	ımeter)		
Standard Finishes	Matte Black Matte White Textured Bronze	BK MWH TB		
Blade Finish	Barn Wood Matte Black Matte White Walnut	BW BK MWH WA		
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60		
TE	CHNICAL SPECS			
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 15	2		
Overall Drop	12 inches/30 cm +downro	d length		
Fan Weight	18 lbs			
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76			
Downrod Diameter	1 inch			
Voltage	110 (Contact us for 220 co	nversion)		
Motor Type	DC			
Environment	Damp locations for all fin Neither coastal, saltwate chlorine compatible			
Ambience	Silent			
Safety Certification	ETL / CETL			
Warranty	Limited Lifetime			
NEW JAN 21, 2020	DOE MOTOR EFFICIENC	Y DATA		

STANDARD EQUIPMENT

42 inch /

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control

52 inch / 132 cm

51 / 129

31.60

88

45°



60 inch /

52 / 103

34.35

83

45°

997 / 2437 | 658 / 2914

NOTE: Only compatible with included controllers



42", 52" or 60" / 107 cm, 132 cm or 152 cm



A complement to any commercial or residential space, the Patrícia-3 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-3 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-3 carries a limited lifetime warranty.





PATRÍCIA-3

	FINISH AND BLADE OPTIONS			
	SKU#	PA3-XX-XXX-XX (Model+Finish+Blade+Di	ameter)	
	Standard Finishes	Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	BN CR TB WH BK	
	NEW Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA	
	Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60	
TECHNICAL SPECS				

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Overall Drop	14 inches/36 cm+downrod length
Fan Weight	19 lbs
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DAT				
	Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
	RPM (Low/High)	52 / 232	51 / 219	51 / 156
	CFM (Low/High)	860 / 4286	1283 / 6077	2113 / 6833
	Watts (High)	16.60	32.03	31.72
	CFM/Watt (High)	258.17	189.72	215.4
	Blade Pitch	15°	15°	15°

Didde Fitch 15	13		
LIGHT KIT PHOTOMETRICS			
Lamping (Replaceable)	Integrated LED		
Remote Dimmable	Yes		
Delivered Temperature in K	3075		
Delivered Lumens	690		
CRI	90		
Watts	16		
Hours	60,000		

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 30°

Light cover


Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



NOTE: Only compatible with included controllers.

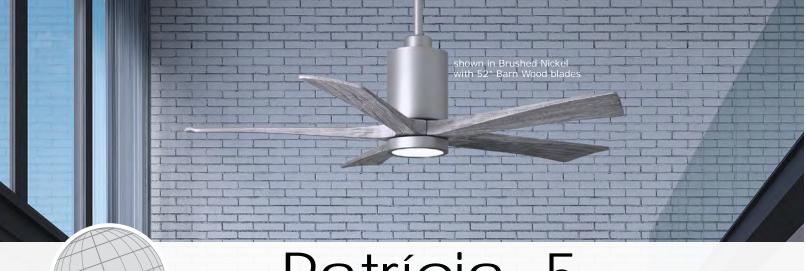

Patrícia-5
Designed in 2015 ATLAS



A complement to any commercial or residential space, the Patrícia-5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-5 carries a limited lifetime warranty.





PATRÍCIA-5

FINISH AND BLADE OPTIONS			
SKU#	PA5-XX-XXX-XX (Model+Finish+Blade+Dia	ameter)	
Standard Finishes	Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	BN CR TB WH BK	
NEW Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA	
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60	
TECHNICAL SPECS			

TESTIMEAE SI ESS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Overall Drop	14 inches/36 cm + downrod length	
Fan Weight	19 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 or 220	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low/High)	53 / 221	51 / 186	51 / 87
CFM (Low/High)	917 / 4386	1398 / 5524	3247 / 5547
Watts (High)	30.47	31.80	31.64
CFM/Watt (High)	143.94	173.71	175.31
Blade Pitch	15°	15°	15°

Warranty | Limited Lifetime

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3075	
Delivered Lumens	690	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse




White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.



Super Janet Designed in 2017





The Super Janet's remarkable design and solid construction in cast aluminum and heavy stamped steel make it the heroine in any commercial or residential space. Moving air with barely a whisper, its efficient DC motor turns solid wood blades in walnut, matte black, matte white, or barn wood tones. An ecoconscious LED light kit with light cover completes the package. Sophisticated, efficient and green, Super Janet carries a limited lifetime warranty.

Product Features



























SUPER JANET

FINISH AND BLADE OPTIONS			
SKU#	SJ-XX-XXX-XX (Model+Finish+Blade+Dia	ameter)	
Standard Finishes	Brushed Nickel Gloss White Matte Black Textured Bronze	BN WH BK TB	
NEW Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA	
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60	
TECHNICAL CRECS			

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Overall Drop	12 inches/30 cm +downrod length	
Fan Weight	17 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 (Contact us for 220 conversion)	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
)	Fan Diameter	42 inch / 107 cm*	52 inch / 132 cm*	60 inch / 152 cm
	RPM (Low/High)	50 / 242	50 / 184	50 / 150
	CFM (Low/High)	915 / 4530	1571 / 5962	2293 / 6495
	Watts (High)	23.62	32.99	33.32
	CFM/Watt (High)	191.75	180.72	194.93
	Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	2776	
Delivered Lumens	419	
CRI	94	
Watts	18	
Hours	50,000	

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 30°

Black 6-speed RF

remote control

with reverse



White wireless Decora-style, 6-speed, wall control



NOTE: Only compatible with included controllers.

*Unipack Shipping for 42 in and 52 in diameters only.





The T-24 is Matthews' reserved, yet contemporary, 52" three-blade ceiling fan. The efficient 3-speed AC motor and Title 24 qualified LED Light Kit are operated by wall control. The T- 24 is offered in Brushed Nickel, Matte White, Matte Black and Textured Bronze with reversible solid wood blades available in Matte White/Brushed Nickel, Gray Ash/Walnut, Old Oak/Matte Black or Light Maple/Barn Wood finishes.

Title 24 Title 24 Complian

















T-24

FINISH AND BLADE OPTIONS

NEW

SKU#	T24-XXX-XXX (Model+Finish+Blad	de)	
Standard Finishes	Brushed Nickel Matte Black Matte White Textured Bronze	BN BK MWH TB	
	Matte White / Brushed Nickel Gray Ash /	MWH/BN	
Blade Finishes (Reversible)	Walnut	GA/WA	
	Light Maple / Barn Wood	MA/BW	
	Old Oak / Matte Black	00 / BK	
TECHNICAL SDECS			

	J. II 11 07 12 01 200
Fan Diameter	52 inches / 132 cm
Overall Drop	10 inches / 25 cm+downrod lengt
Fan Weight	22 lbs
Voltage	110 or 220
Motor Type	AC
Downrod Diameter	1 inch
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	68 / 169	
CFM (Low / High)	1993 / 5185	
Watts (High)	61.44	
CFM/Watt (High)	93	
Blade Pitch	14°	

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	2899	
Delivered Lumens	631.9	
CRI	91.3	
Watts	20	
Hours	36,000	

Light kit longevity if used 6 Hours/Day: 16.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Vaulted ceiling canopy for up to 29°

Decora-style, 3-speed, dimmable wall control






Blade Options (Reversible)











The Ar Ruthiane's unique hourglass support arms grasp bullet-shaped motor housings which rotate 360° about its teardrop center. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

- Product Features

American Labor

















Soothing White Noise





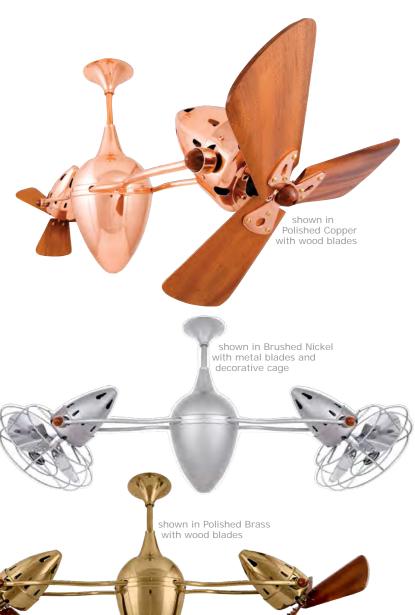

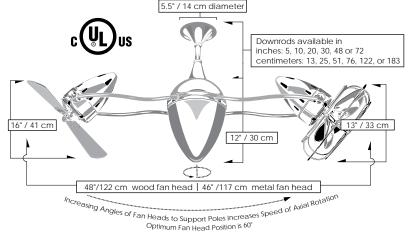

AR RUTHIANE

FINISH AND BLADE OPTIONS		
SKU#	AR-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
Fan Blade	Wood Blade Metal Blade	WD MTL
TECHNICAL SDECS		

	1112		
TECHNICAL SPECS			
Fan Weight	21 lbs		
Voltage	110 or 220		
Motor Type	AC		
Rotation	Yes		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183		
Downrod Diameter	.75 inch		
Overall Drop	12 inches / 30 cm + downrod length		
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		
Warranty	Limited Lifetime		
NEW JAN 21, 2020	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	48 inches /122 cm	46 inches/117 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	723 / 1308	591 / 1075
CFM (Low / High)	2644 / 4724	1215 / 2371
Watts (High)	96.94	103.53
CFM/Watt (High)	48.73	22.90
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Flat ceiling canopy

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy




Standard Finishes











Special Order Finishes

Brushed Copper

Polished Copper

Polished Chrome

Polished Chrome

Brushed Nickel





Unique and versatile, the fan head of the Bianca Directional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Bianca can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Bianca Directional carries a limited lifetime warranty.





























BIANCA DIRECIONAL

DIN	LCIONAL	-
FINISH A	AND BLADE OPTIONS	
SKU#	BD-XXXXXXXXXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
Fan Blade	Wood Blade Metal Blade	WD MTL
TI	ECHNICAL SPECS	
Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	

.75 inch

UL / CUL

Limited Lifetime

Metal Blades:

Wood Blades:

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	926 / 1280	615 / 1149
CFM (Low / High)	1568 / 2274	814 / 1199
Watts (High)	47.46	49.00
CFM/Watt (High)	47.91	24.47
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Flat ceiling canopy (Not compatible with vaulted ceiling canopy)

Decora-style, 3-speed wall control in white



13 inches / 33 cm

+ downrod length

16 inches / 41 cm

+ downrod length

Damp location with protective powder or clear coat only. Neither

coastal, saltwater nor chlorine compatible.

Soothing White Noise















Special Order Finishes



Polished Copper

Downrod Diameter

Overall Drop

Environment

Safety Certification

Ambience

Warranty

Polished

Polished Chrome Brushed Nickel






Brisa 2000



Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.

























BRISA 2000

FINISH .	AND BLADE OPT	IONS
SKU#	B2K-XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome I Brushed Nickel Da Gloss White	
Fan Blade	Wood Blade Metal Blade	WD MTL
TE	ECHNICAL SPECS	
Fan Weight	21 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	10 inches / 25 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020	DOE MOTOR EFF	FICIENCY DATA
Fan Head Options	Solid Mahogany Wood*	Metal with Guard
Fan Diameter	40 inches /102 cm	39 inches/99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	866 / 1336	790 / 1205
	/	l /

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Flat ceiling canopy

CFM (Low / High) 1602 / 2376

Watts (High) 52.44

Blade Pitch 19°

CFM/Watt (High) 45.31

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

NOTE: *Unipack Shipping for Wood Blades only










Increasing Angles of Fan Heads to Support Poles Increases Speed of Axial Rotation

Optimum Fan Head Position is 60°



Special Order Finishes



Polished Copper

Polished Chrome

Polished Chrome

Brushed Nickel

790 / 1265


55.15

22.94

62




Bruna Parede

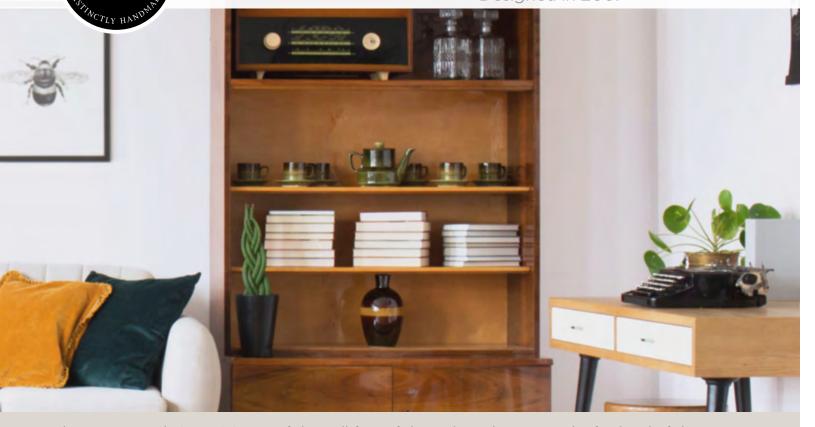

The Bruna Parede is reminiscent of the wall fans of the early 20th century. The fan head of the Bruna Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Bruna Parede carries a limited lifetime warranty.





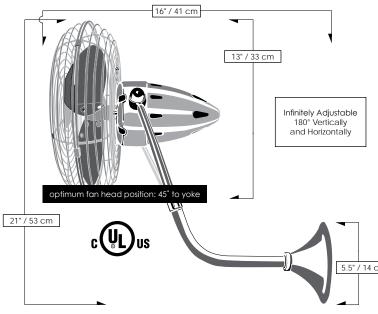

BRUNA PAREDE

FINISH AND BLADE OPTIONS		
SKU#	BP-XXXXXX (Model+Finish)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
TECHNICAL SPECS		

	Fan Weight	8 lbs	
	Voltage	110 or 220	
	Motor Type	AC	
	Oscillation	No	
	Fan Diameter	13 inches / 33 cm	
	Fan Height	20 inches / 51 cm	
	Fan Projection	16 inches / 41 cm	
1	Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling	
	Fan Guard	Safety Cage	
	Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
	Ambience	Soothing White Noise	
Saf	ety Certification	UL / CUL	
	Warranty	Limited Lifetime	
N	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

STANDARD	EQUIPMENT


Safety cage Side-mounted wall junction box

RPM (Low / High) 1021 / 1418 CFM (Low / High) 839 / 1181 Watts (High) 49.00

CFM/Watt (High) 24.01 Blade Pitch 31°

Decora-style, 3-speed wall control in white














Special Order Finishes


Brushed Copper

Polished Copper Polished Chrome Damp

Brushed Nickel Damp Gloss White



Few designs can match the timeless and sophisticated aesthetic of the Duplo-Dinamico 360° rotational fan. Other manufacturers have tried to reproduce this unique design, though all have proven to be of lesser quality and durability. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Duplo carries a limited lifetime warranty.
























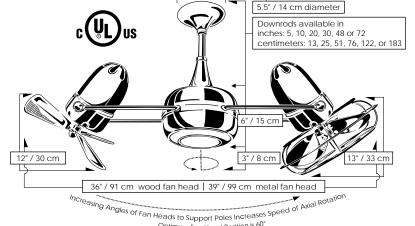

Optimum Fan Head Position is 60°










Polished Brass

Polished Copper

Polished Chrome

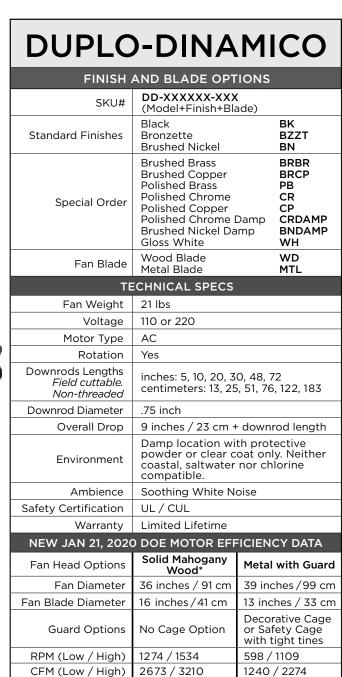

43.34 CFM/Watt (High) 22.00 Blade Pitch 19° 31°

STANDARD EQUIPMENT

103.35

One downrod of 10 inches / 13 cm

Watts (High)

Flat ceiling canopy

Decora-style, 3-speed wall control in white

74.06

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

NOTE: *Unipack Shipping for Wood Blades only



Italo Ventania

Designed in 2007



The Italo Ventania is the largest 360° rotational fan in the Matthews Fan Co collection. Its vortex sculpted arms grasp also remarkable, side-mounted fan heads in gentle, equatorial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

Product Features


























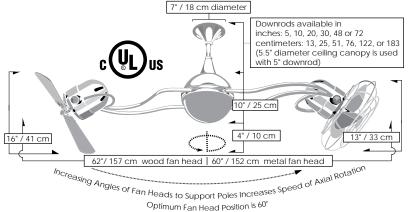

Standard Finishes





Brushed Nickel

ITALO VENTANIA

FINISH AND BLADE OPTIONS			
SKU#	IV-XXXXXX-XXX (Model+Finish+Blade)		
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH	
Fan Blade	Wood Blade Metal Blade	WD MTL	

TECHNICAL SPECS			
Fan Weight	24 lbs		
Voltage	110 or 220		
Motor Type	AC		
Rotation	Yes		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183		
Downrod Diameter	.75 inch		
Overall Drop	14 inches / 36 cm + downrod length		
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	62 inches / 157 cm	60 inches / 152 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	715 / 1209	685 / 1139
CFM (Low / High)	2644 / 4519	1372 / 2278
Watts (High)	91.63	94.76
CFM/Watt (High)	49.32	24.04
Blade Pitch	19°	31°

Warranty | Limited Lifetime

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm


Flat ceiling canopy

Decora-style, 3-speed wall control in white OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy







Brushed

Brushed

Polished

Polished Chrome

Polished Chrome

Brushed Nickel





Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.
















Soothing White Noise







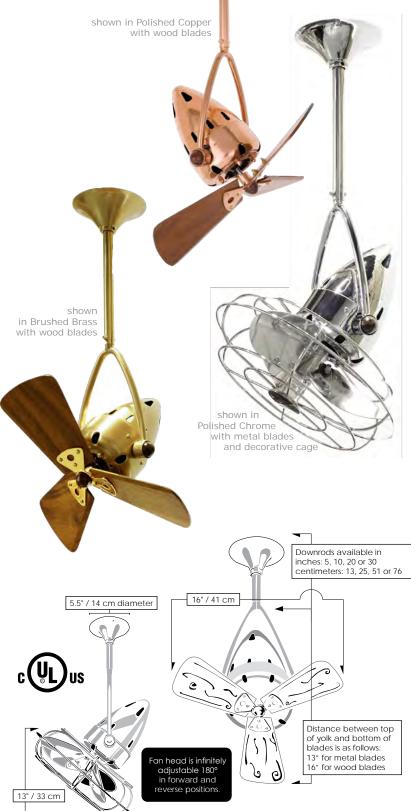

JAROLD DIRECIONAL

DIK	ECION	NAL	-
FINISH .	AND BLADE OI	PTIONS	
SKU#	JD-XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX		
Standard Finishes	Black Bronzette Brushed Nickel		BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrom Polished Coppe Polished Chrom Brushed Nickel Gloss White	e r e Damp	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
Fan Blade	Wood Blade Metal Blade		WD MTL
Т	ECHNICAL SPEC	S	1112
Fan Weight	7 lbs		
Voltage	110 or 220		
Motor Type	AC		
Oscillation	No		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76		
Downrod Diameter	.75 inch		
Overall Drop	Metal Blades:		es / 33 cm rod length
Overdii Brop	Wood Blades:		es / 41 cm rod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		
Warranty	Limited Lifetime		
NEW JAN 21, 2020	DOE MOTOR E	FFICIEN	ICY DATA
Fan Head Options	Solid Mahogan Wood	y Meta	l with Guar
Fan Diameter	16 inches / 41 cn	n 13 inc	hes / 33 cm
Fan Blade Diameter	16 inches / 41 cn	n 13 inc	hes / 33 cm
Guard Options	No Cage Option	or Sat	rative Cage fety Cage ight tines
RPM (Low / High)	955 / 1318	615 /	
CFM (Low / High)	1701 / 2368	800 /	1162

STANDARD EQUIPMENT

46.77

One downrod of 10 inches / 13 cm

Flat ceiling canopy (Not compatible with vaulted ceiling canopy)

Watts (High)

CFM/Watt (High) 50.63

Blade Pitch 19°

Decora-style, 3-speed wall control in white















Special Order Finishes



Polished Copper

Polished Chrome

Polished Chrome

Brushed Nickel

48.39

24.01

31°





The Michelle Parede is reminiscent of wall fans of the early 20th century. The fan head of the Michelle Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Michelle Parede carries a limited lifetime warranty.
























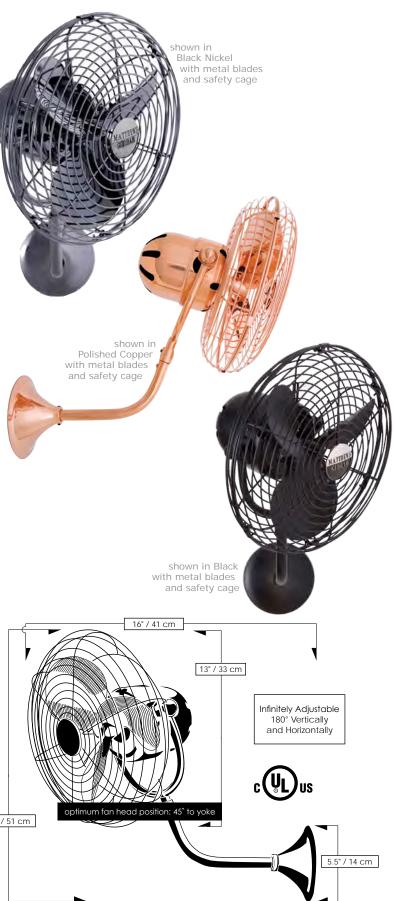

MICHELLE PAREDE

FINISH AND BLADE OPTIONS			
SKU#	MP-XXXXXX (Model+Finish)		
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH	

TECHNICAL SPECS		
Fan Weight	8 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Fan Diameter	13 inches / 33 cm	
Fan Height	20 inches / 51 cm	
Fan Projection	16 inches / 41 cm	
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling	
Fan Guard	Safety Cage	
Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

STANDARD EQUIPMENT
Safety cage
Side-mounted wall junction box

Decora-style, 3-speed wall control in white

RPM (Low / High) | 1020 / 1418

CFM (Low / High) | 838 / 1181 Watts (High) 49.00

CFM/Watt (High) 24.01 Blade Pitch 31°



Standard Finishes

Brushed Nickel

Brushed **Brass**

Polished Brass

Special Order Finishes

Polished Copper

Polished Chrome

Polished Chrome Damp Brushed Nickel Damp

73

72





Vent-Bettina

Designed in 2002



The Vent-Bettina 360° rotational fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation with motor heads which can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Vent-Bettina carries a limited lifetime warranty.


























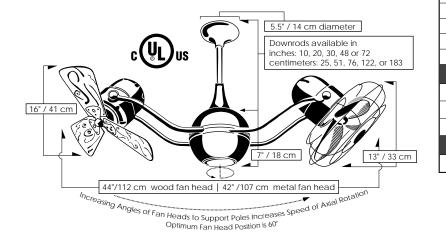

VENT-BETTINA

FINISH AND BLADE OPTIONS			
SKU#	VB-XXXXXXXXXXX (Model+Finish+Blade)		
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH	
Fan Blade	Wood Blade Metal Blade	WD MTL	
TECHNICAL SPECS			
Fan Weight	19 lbs		
Voltage	110 or 220		

TECHNICAL SPECS		
Fan Weight	19 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths Field cuttable. Non-threaded	inches: 10, 20, 30, 48, 72 centimeters: 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	7 inches / 18 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW IAN 21 2020 DOE MOTOR EFFICIENCY DATA		

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Head Options	Solid Mahogany Wood	Metal with Guard	
Fan Diameter	44 inches /112 cm	42 inches / 107 cm	
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm	
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines	
RPM (Low / High)	796 / 1252	699 / 1101	
CFM (Low / High)	2070 / 329	1346 / 2077	
Watts (High)	87.32	89.63	
CFM/Watt (High)	37.71	23.17	
Blade Pitch	19°	31°	

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm Flat ceiling canopy

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy



Standard Finishes














Special Order Finishes

Brass

Brushed

Polished Copper

Polished

Polished Chrome

Brushed Nickel

